## **GC Application** ID No.: **16122**



## **Siloxanes on ZB-5HT**

Zebron™ ZB-5HT, GC Cap. Column 15 m x 0.32 mm x 0.10 μm, Ea Column:

Phase: 5% Phenyl 95% Dimethylpolysiloxane **Dimensions:** 15 meters x 0.32 mm x 0.1  $\mu m$ 

Order No: 7EM-G015-02

**Oven Profile:** 60°C to 400°C at 25°C/min for 10min


**Carrier Gas:** Constant Flow Helium, 2.9 mL/min Injection: On-Column :1 0.1 µL @ 63°C **Detection:** Flame Ionization (FID) (425°C) Analyst Note: Extracted septum with carbon disulfide

16122



Products used in this application:



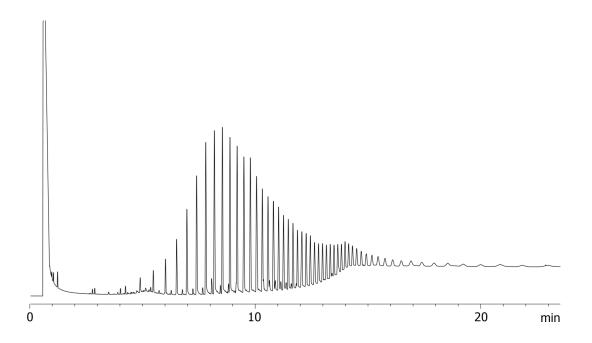

## **ANALYTES:**

Siloxanes

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at support@phenomenex.com



Phenomenex products are available worldwide. www.phenomenex.com