GC Application ID No.: **16124**



Polywax® 500 on ZB-5HT

Zebron™ ZB-5HT, GC Cap. Column 15 m x 0.32 mm x 0.10 µm, Ea Column:

Phase: 5% Phenyl 95% Dimethylpolysiloxane **Dimensions:** 15 meters x 0.32 mm x 0.1 μ m

Order No: 7EM-G015-02

16124

Oven Profile: 60°C to 380°C at 25°C/min for 5min


Carrier Gas: Constant Flow Helium, 2.9 mL/min Injection: On-Column :1 0.1 µL @ 63°C **Detection:** Refractive Index (400°C)

Analyst Note: Sample was 1mg/mL in carbon disulfide. Polywax is a trademark of Petrolite Specialty Polymers Group.



Products used in this application:



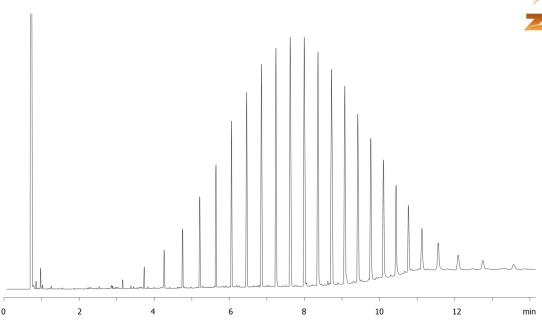

ANALYTES:

1 Polywax® 500

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at support@phenomenex.com



Phenomenex products are available worldwide. www.phenomenex.com