

**Siloxane Polymers on ZB-1XT SimDist 5x0.53x0.09**

**Column:** Zebtron™ ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea  
**Phase:** 100% Dimethylpolysiloxane  
**Dimensions:** 5 meters x 0.53 mm x 0.09 µm  
**Order No:** 7AK-G026-55  
**Oven Profile:** 35 °C to 430 °C @ 10 °C/min for 20 min.

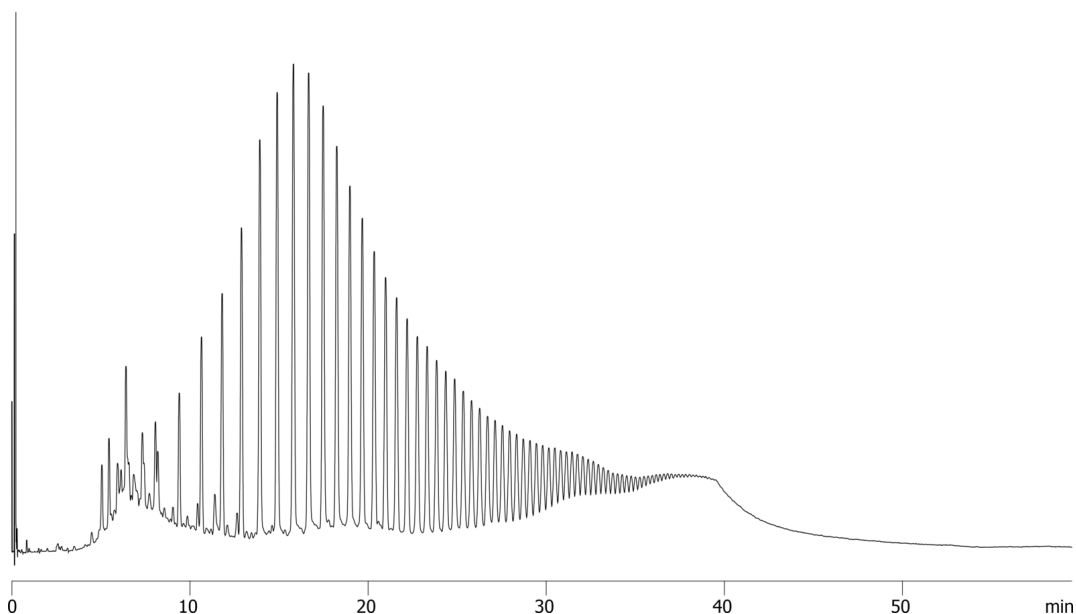
**Carrier Gas:** Constant Flow Helium, 15 mL/min

**Injection:** On-Column :1 1 µL @ 53°C

**Detection:** Refractive Index (450°C)

**Analyst Note:** This chromatogram has been baseline subtracted. Sample was silicone caulk dissolved in CS<sub>2</sub>.

19253

**Products used in this application:****ANALYTES:**

- 1 Siloxane polymers

