## GC Application ID No.: 19256



## Yeates Crude Oil on ZB-1XT 5x0.53x0.09

Column: Phase: Dimensions: Order No: Oven Profile:	Zebron <sup>™</sup> ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea 100% Dimethylpolysiloxane 5 meters x 0.53 mm x 0.09 µm 7AK-G026-55 35 °C to 450 °C @ 10 °C/min for 20 min	
Carrier Gas: Injection:	Constant Flow Helium, 15 mL/min On-Column :1 1 µL @ 38°C	


On-Column :1 1 µL @ 38°C **Detection:** Flame Ionization (FID) (450°C)

Analyst Note: Sample is 1% in CS2. Chromatogram is baseline subtracted.

Products used in this application:



19256

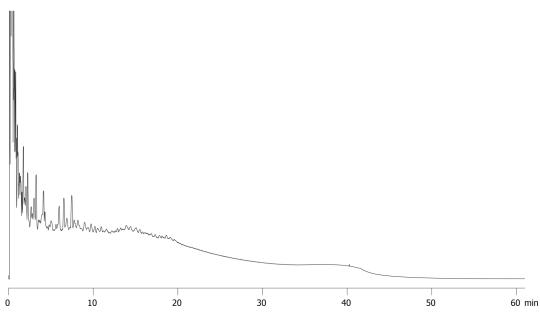

## **ANALYTES:**

Yeates crude oil 1

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com

For more information contact your Phenomenex Representative at support@phenomenex.com