

## Polystyrene MW Standard on Phenogel 5u 50A without SecurityGuard

**Column:** Phenogel™ 5 µm 50A, LC Column 300 x 7.8 mm, Ea

**Dimensions:** 300 x 7.8 mm ID

**Order No:** 00H-0441-K0

**Elution Type:** Isocratic

**Eluent A:** THF

| Gradient | Step No. | Time (min) | Pct A |
|----------|----------|------------|-------|
| Profile: | 1        | 0          | 100   |


**Flow Rate:** 1 mL/min

**Col. Temp.:** ambient

**Detection:** UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)  
22610



Products used in this application:

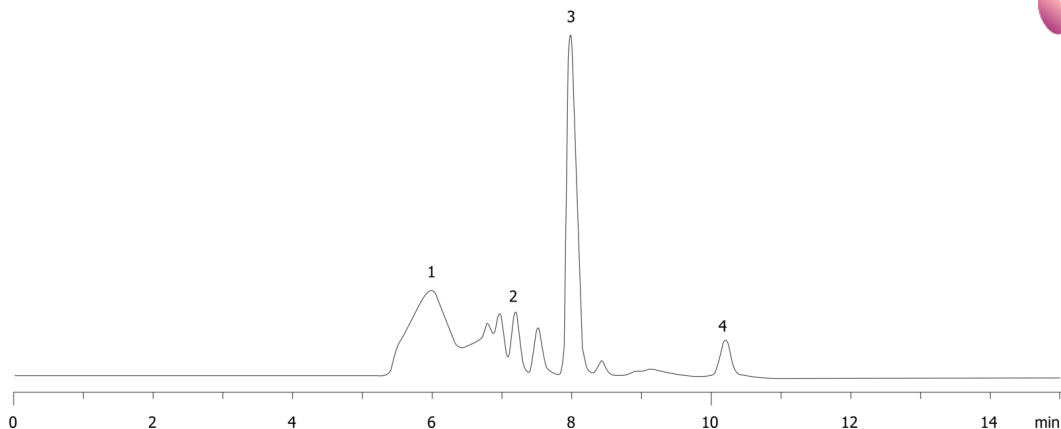

### ANALYTES:

- 1 2400 Da
- 2 1490 Da
- 3 545 Da
- 4 162 Da

