

Polystyrene MW Standard on Phenogel 5u 100A with SecurityGuard

Column: Phenogel™ 5 µm 100A, LC Column 300 x 7.8 mm, Ea

Dimensions: 300 x 7.8 mm ID

Order No: 00H-0442-K0

Elution Type: Isocratic

Eluent A: THF

Gradient	Step No.	Time (min)	Pct A
Profile:	1	0	100


Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)
22613



Products used in this application:

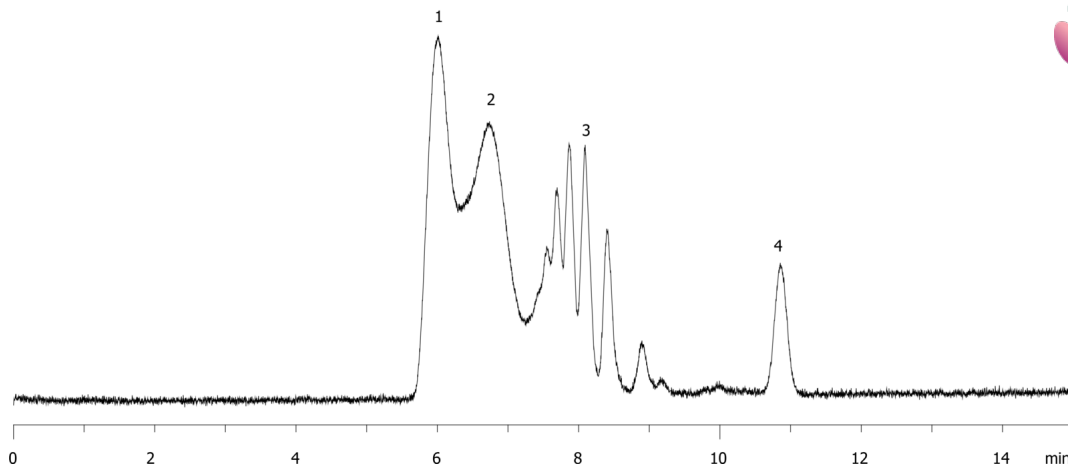

ANALYTES:

- 1 5480 Da
- 2 2400 Da
- 3 1490 Da
- 4 545 Da

