

## Polystyrene MW Standard on Phenogel 5u Linear(2) with SecurityGuard

**Column:** Phenogel™ 10 µm Linear(2), LC Column 300 x 7.8 mm, Ea

**Dimensions:** 300 x 7.8 mm ID

**Order No:** 00H-3260-K0

**Elution Type:** Isocratic

**Eluent A:** THF

| Gradient | Step No. | Time (min) | Pct A |
|----------|----------|------------|-------|
| Profile: | 1        | 0          | 100   |


**Flow Rate:** 1 mL/min

**Col. Temp.:** ambient

**Detection:** UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)  
22615



Products used in this application:

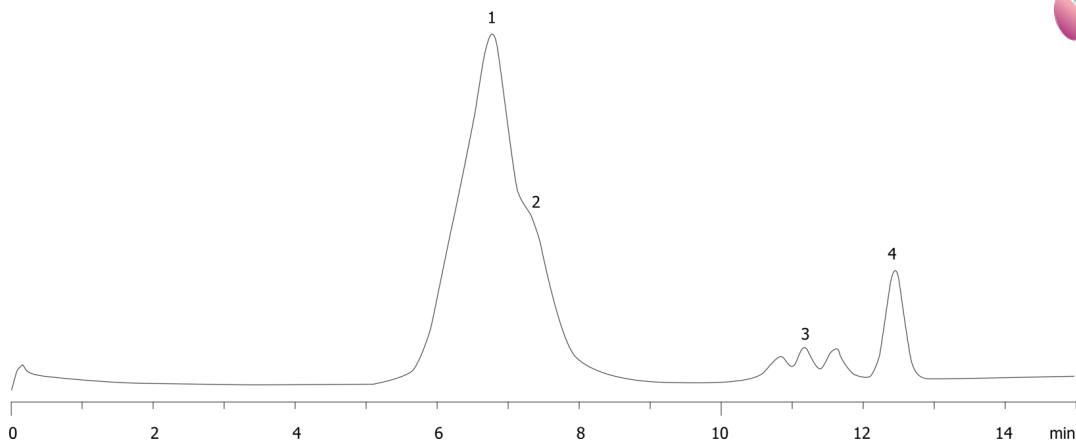

### ANALYTES:

- 1 7000K
- 2 1970K
- 3 670K
- 4 277K

