

## Poly-(e-Methyl styrene) (Wide MW Range)

**Column:** Phenogel™ 5 µm 10E5A, LC Column 300 x 7.8 mm, Ea

**Dimensions:** 300 x 7.8 mm ID

**Order No:** 00H-0446-K0

**Elution Type:** Isocratic

**Eluent A:** Tetrahydrofuran

| Gradient | Step No. | Time (min) | Pct A |
|----------|----------|------------|-------|
| Profile: | 1        | 0          | 100   |

**Flow Rate:** 1 mL/min


**Col. Temp.:** ambient

**Detection:** Differential refractometer @ nm (ambient)

**Analyst Note:** 4 Phenogel 5µ columns (300 x 7.8mm ID) placed in series as follows: 10<sup>5</sup>Å, 10<sup>4</sup>Å, 10<sup>3</sup>Å, 500Å.



Products used in this application:

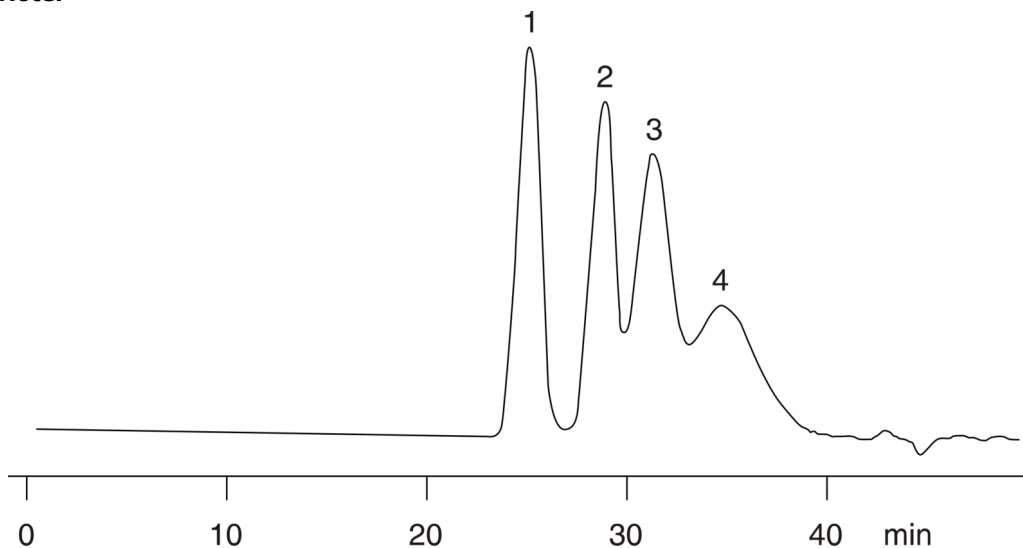

### ANALYTES:

- 1 680,000 MW
- 2 90,000 MW
- 3 30,000 MW
- 4 6,000 MW

