

## 25 Hr on Rezex ROA

**Column:** Rezex™ ROA-Organic Acid H+ (8%), LC Column 300 x 7.8 mm, Ea

**Dimensions:** 300 x 7.8 mm ID

**Order No:** 00H-0138-K0

**Elution Type:** Isocratic

**Eluent A:** 0.005N Sulfuric Acid

| Gradient | Step No. | Time (min) | Pct A |
|----------|----------|------------|-------|
| Profile: | 1        | 0          | 100   |

**Flow Rate:** 0.6 mL/min

**Col. Temp.:** 60 °C

**Detection:** Refractive Index (RI) @ (40 °C)

**Detector Info:** Shimadzu Prominence LC-20A System (LC-20AT pump, DGU-20A3 Membrane Degasser, SIL-20AC Autosampler, CTO-20A Column Oven, RID-10A Differential Refractive Index Detector, CBM-20A System Controller, Class-VP Chromatography Data System.

**Analyst Note:** SecurityGuard™ Guard Cartridge System extends column lifetime.


- SecurityGuard Cartridges, Carbo-H 4 x 3.0mm, 10/Pk Part No.: AJ0-4490
- Holder Part No.: KJ0-4282

**REZEX™**  
HPLC COLUMNS for Carbohydrates, Oligosaccharides, and Organic Acid Analysis



Products used in this application:

**REZEX™**

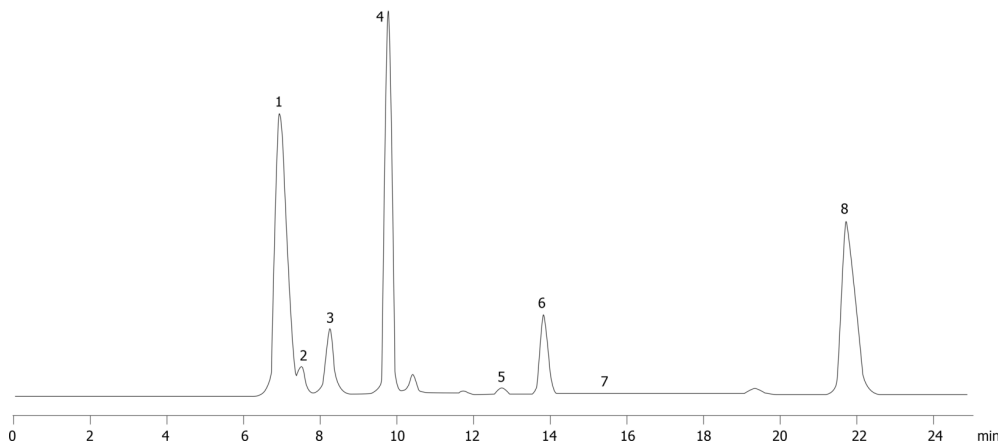

### ANALYTES:

- 1 DP4+
- 2 DP3
- 3 Maltose
- 4 Glucose
- 5 Lactic acid
- 6 Glycerol
- 7 Acetic acid
- 8 Ethanol

